



DATA SHEET
1 / 4

Chapter 8 & BS compliant Barrier and Reflector for pedestrian delineation

BARRIER

	PROFESSIONAL BARRIER	PROFESSIONAL BARRIER ANTI TRIP
PRODUCT CODE	PRO	PROANTI
WL	2005MM	2005MM
W	504MM	504MM
H	1000MM	1000MM
WEIGHT (KG)	11.2	11.2
PER PALLET	50	50
PER FULL LOAD	600	600
MATERIAL	UVHDPE	UVHDPE
COLOUR	ORANGE / CUSTOM	ORANGE / CUSTOM
FOOT COLOUR	BLACK	YELLOW
CONFIRMED WIND SPEED	19.5 mph	19.5 mph

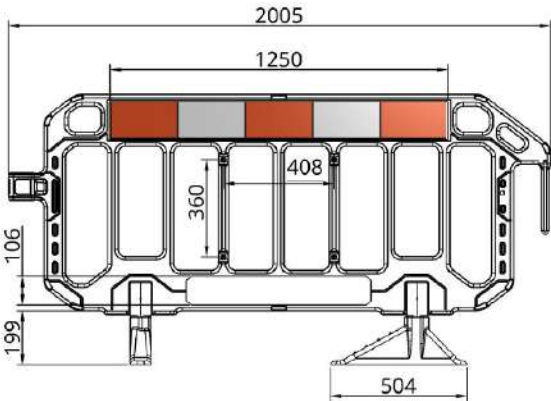

CUSTOM OPTIONS:**Permit Board:** 600 x 400mm:**Holes:** D=10mm**Spacing:** H=409 V=360mm

Dxf file available on request

Removable Anti trip foot**Removable Hi Vis Anti trip foot****Embossing / Branding area:**

W =660 x h =86mm

Custom colours:

Orange
Red
White
Blue
Yellow
Green



BALLAST REQUIREMENTS (BS 8442: 2006)

WIND TUNNEL TESTED
CSTB
le futur en construction

CAT C WIND, 19.5mph = 0KG
CSTB ACTUAL SPEED 19.5 MPH



CAT B WIND, 39mph = 30KG
CSTB ACTUAL SPEED 44.7 MPH



CAT A WIND = 58mph = 60KG
CSTB ACTUAL SPEED 66.4 MPH



CAT A WIND – 58mph = 75KG
CSTB ACTUAL SPEED 61.5 MPH



PLEASE WEAR APPROPRIATE PPE


TOOLS



PRISE TOOL
MIN WIDTH= 25MM






SPIGOT



SPIGOT & FOOT

SPIGOT REMOVAL

WARNING: NARROW PRISE TOOLS WILL DAMMAGE THE BARRIER

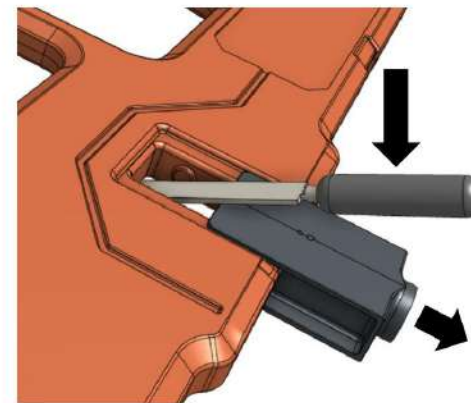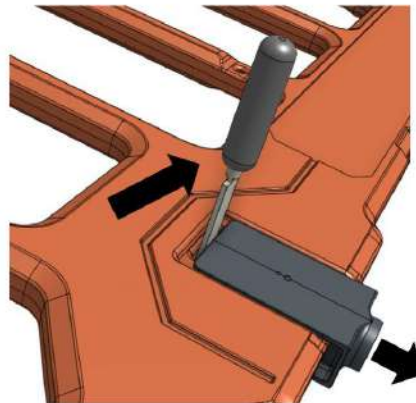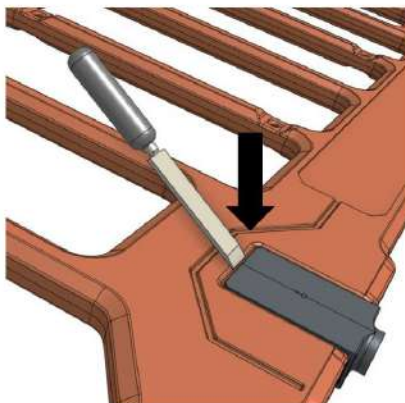

REPLACEMENT

