

### BARRIER

#### RB2000 BARRIER

PRODUCT CODE	RB2000
DIMENSIONS (MM)	L2000 H1000 D400 / WL1650
MAX ANGLE (DEG)	25 DEG
MATERIAL	UV MDPE
FILL CAPACITY (L)	365L
WEIGHT E / F (KG)	35 /400KG
COLOURS	RED / WHITE
FILL / DRAIN HOLES (MM)	95 / 25MM
FORK CHANNELS	2 X 200 X 50MM
NO PER PALLET	6 OVER SIZED
CONFIRMED WIND SPEED	72 MPH (MIRA not tot failure)

### ACCESSORIES

#### RB2000 FRONT STOP

RB2000FS
L550 H1000 D 400
-
UV MDPE
-
5KG
RED / WHITE
-
-
24
-

#### RB2000 REAR STOP

RB2000 ES
L550 H1000 D 400
-
UV MDPE
-
5KG
RED / WHITE
-
-
24
-

#### NOTE:

System dimensions are approximated and taken up to the main panel height



### ACCESSORIES

#### RB2000 MESH

PRODUCT CODE	RBFP
DIMENSIONS (MM)	L1500 H1120 D40
MATERIAL	STEEL POWDER COAT
PANEL WEIGHT	12
COUPLING	NOT SHOWN
COLOURS	WHITE
NO PER PALLET	25 OVER SIZED
MIRA WIND SPEED	70MPH



#### RB2000 50 / 50

RB2000HHHM
L1500 H1120 D40
STEEL POWDER COAT
15
-
WHITE

#### RB2000 HOARDING

RBHP
L1500 H1120 D40
STEEL POWDER COAT
21
-
WHITE
25 OVERSIZED
50MPH

**NOTE:**  
System dimensions  
are approximated  
and taken up to the  
main panel height

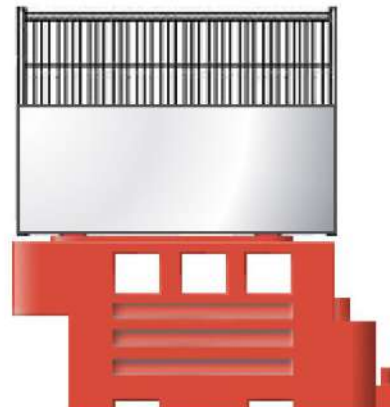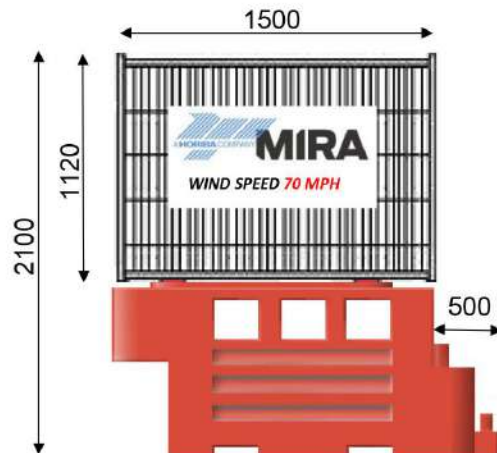

## RB2000 BARRIER SYSTEM



## DATA SHEET

3 / 6

Rugged water filled barrier for traffic and pedestrian delineation


## ACCESSORIES

### RB2000 MESH EXTENSION

PRODUCT CODE	RB2000MEP
DIMENSIONS (MM)	L1500 H1660 D40
MATERIAL	STEEL POWDER COAT
PANEL WEIGHT	25
COUPLING	NOT SHOWN
COLOURS	WHITE
NO PER PALLET	25 OVER SIZED

#### NOTE:

System dimensions are approximated and taken up to the main panel height

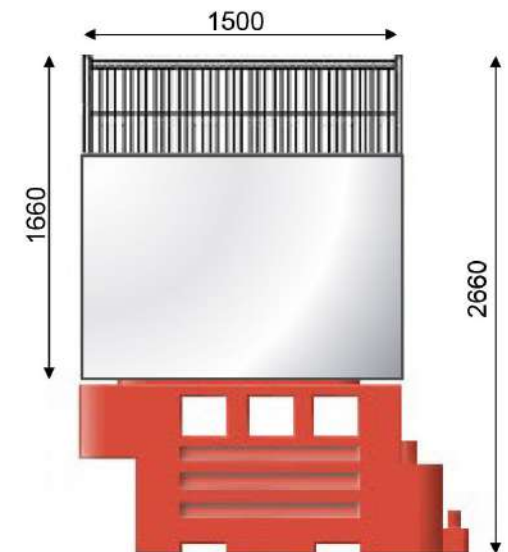

# RB2000 BARRIER SYSTEM



## DATA SHEET 4 / 6

Steel gate system providing safe access to site

### ACCESSORIES

#### RBB 2000 MESH GATE




#### RB 2000 SOLID GATE

PRODUCT CODE	1MPGFM
GATES (M)	W=1 X H=2.4 / CUSTOM
FLAG PANELS	1 X 590MM / 1 X 160MM
RUBBER FEET	2 X 18 KG
BARRIER ENDS	1 X RB2000 END 1 1 X RB2000 END 2
TOTAL WEIGHT	
FILL PANELS	OPTIONAL EXTRA

1MPGFH
W=1 X H=2.4 / CUSTOM
1 X 590MM / 1 X 160MM
2 X 18 KG
1 X RB2000 END 1 1 X RB2000 END 2

#### NOTE:

System dimensions are approximated and taken up to the main panel height

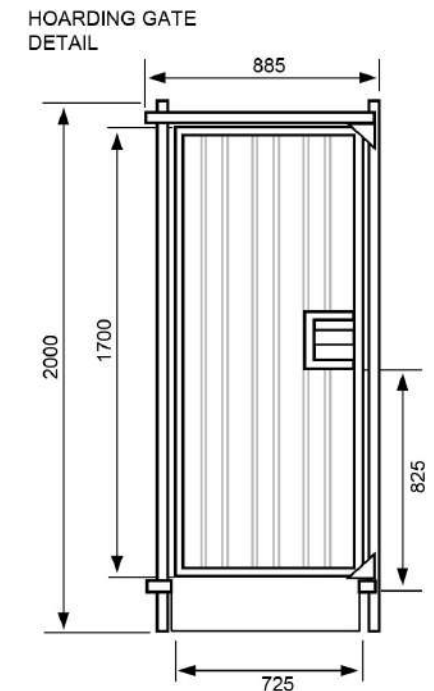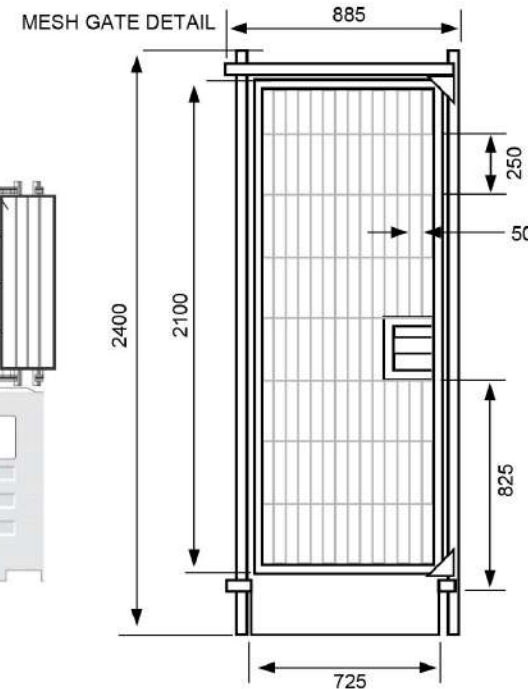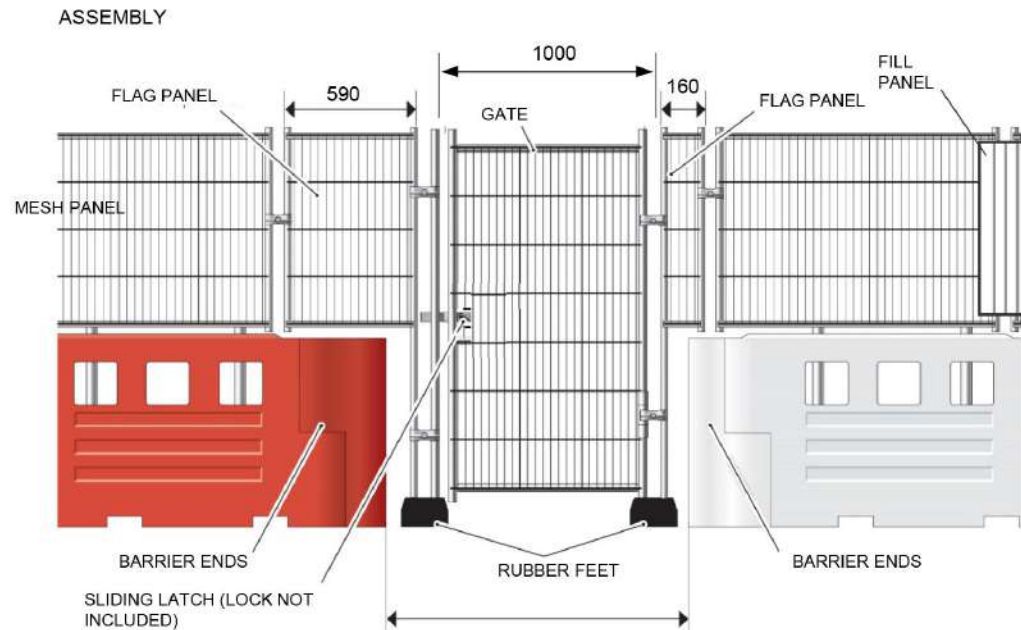

### ACCESSORIES

	RBB 2000 VEH GATE	RB 2000 SOLID VEH GATE
PRODUCT CODE	5M= 5MVGFM 7M= 7MVGFM	4M= VG4M
GATES (M)	W = 2 / 3 / 4 x H = XX	W = 2 / 3 / 4 x H = XX
FLAG PANELS	1 X 590MM / 1 X 160MM	1 X 590MM / 1 X 160MM
RUBBER FEET	2 X 18 KG	2 X 18 KG
BARRIER ENDS	1 X RB2000 END 1 1 X RB2000 END 2	1 X RB2000 END 1 1 X RB2000 END 2
TOTAL WEIGHT		
FILL PANELS	OPTIONAL EXTRA	



MESH GATE ASSEMBLY – SOLID NOT SHOWN

FLAG PANEL

590

FILL PANEL  
bolts on to front  
of post using  
supplied bolts

MESH GATE

4/5/7M

MESH GATE

160

FLAG PANEL

MESH PANEL

BARRIER ENDS

RUBBER FEET

SLIDING LATCH (LOCK NOT INCLUDED)

CASTORS


RUBBER FEET

BARRIER ENDS


#### NOTE:

System dimensions are approximated and taken up to the main panel height



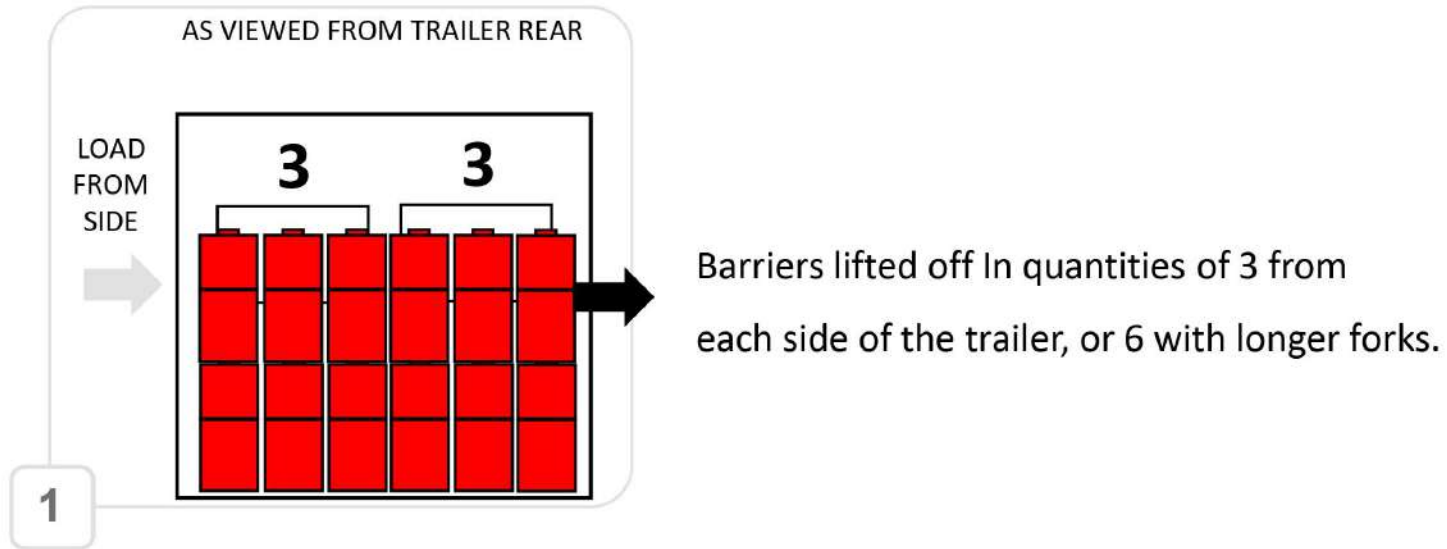

**WARNING - BARRIERS ARE INTERLOCKED  
UNSTACK IN THE ORDER SHOWN**

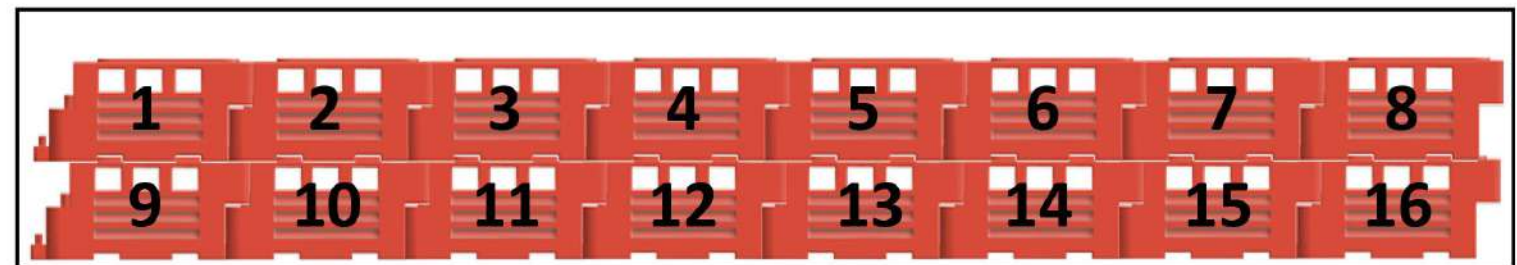

AS VIEWED FROM TRAILER SIDE

**NOTE:**  
System dimensions are approximated and taken up to the main panel height

2

## **WARNING: FAILURE TO FOLLOW THESE GUIDELINES COULD RESULT IN INJURY OR DEATH**

**Oaklands Group always recommends that a site survey and a full risk assessment must be carried out before using the equipment.**

**It is the responsibility of the end user to make sure the system is suitable for their intended use. The system must be installed by an experienced and competent person and inspected regularly.**

**The information provided is for the Oaklands original parts and accessories only, and not valid for non-Oaklands supplied components.**

**Oaklands cannot be held responsible for the quality or performance of non-Oaklands supplied components.**

1. Tipping and sliding values, where provided, are as guide only and It is the customers responsibility to ensure the barrier and fencing system selected is suitable for their specific location.
2. The system should be installed on a flat, level surface.
3. Water ballast must be added to the correct level as indicated in the data sheet.
4. Water ballast level must be regularly checked and maintained to the fill level.
5. Connecting steel work and fencing systems must be regularly inspected for cracks of faults and replaced if faulty.
6. Connecting steel work fasteners must be regularly inspected for tightness.
7. In unsupported areas such as gates addition ballast may be required